

## SIDELINE™ Single Bag Filter Housing

*Reliable, mid-priced  
filter housing for most  
applications*

Eaton's SIDELINE single bag filter housing is a mid-priced bag filter housing for most industrial applications.

This single bag filter housing is a solid, investment-cast filter. Units come standard with filter bag size 01 or 02 stainless steel restrainer baskets.

### Features

- Side inlet with evacuation cover prevents spillage of unfiltered liquid, allowing for clean and easy filter bag change-outs
- Cover opening direction easily adapts to different piping layouts and adjusts in the field to accommodate walls, posts or other obstructions

- Compression hold down creates 360 degree sealing between the filter bag and the bag filter housing
- Ergonomic, integral cover handle is easy to open
- Standard design available with threaded or flanged connections
- Smooth, bead-blasted finish, coupled with a minimum two-weld design makes it easy to completely clean the interior
- Designed in accordance with Section VIII, Division 1 of the ASME Code

### Options

- Available in 316 stainless steel for high corrosion resistance
- Magnetic inserts to collect metallic chips, fines and dust for sizes 01 and 02
- Buna-N® O-rings for the cover are standard. EPDM, Viton®, PTFE encapsulated Viton or silicone rubber seals and gaskets are available
- Multiple I/O connections to suit application
- Available with eye-bolt closure or T-bolt closure for faster maintenance

Viton® is a registered trademark of E. I. du Pont de Nemours and company.



SIDELINE with T-bolt closure (TSBF)



Compression bag hold down creates 360 degree sealing between filter bag and bag filter housing



Ergonomic, integral cover handle is easy to open and close

# EATON


*Powering Business Worldwide*

# SIDELINE Single Bag Filter Housing

## Applications

Coarse filtration > 500 µm	✓
Medium filtration > 10 µm	✓
Fine filtration < 10 µm	

Pre-filtration	✓
Safety filtration	✓
High volume	
Batch filtration	✓
Circuit filtration	✓
Continuous filtration	
Solvents, paints	✓
Fats and oils	✓
Catalyst, activated carbon	
Acids, bases	✓
Petrochemicals	✓
Water, waste water	✓
Chemical industry	✓
Pharmaceuticals	
Metal cleaning	✓
Automotive	
Electronics	
Food and beverage	✓
Paint and lacquer	✓
Water treatment	✓
Galvanic industry	✓

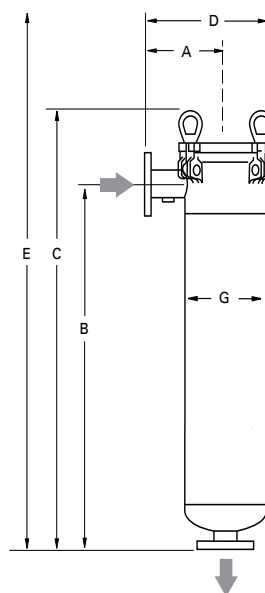

Dimensions - inch (mm)

Models	A	B	C	D	E	G
SBF-0101	8.66 (220)	19.50 (495)	26.62 (676)	14.38 (365)	38.00 (965)	8.62 (219)
SBF-0102	8.66 (220)	35.00 (889)	42.12 (1,070)	14.38 (365)	69.00 (1,753)	8.62 (219)
SBF-0103*	3.50 (110)	11.81 (300)	18.12 (460)	7.48 (190)	23.00 (584)	4.49 (114)
SBF-0104*	3.50 (110)	17.87 (454)	24.25 (616)	7.48 (190)	34.50 (876)	4.49 (114)
TSBF-0101*	8.66 (220)	19.50 (495)	23.62 (600)	13.50 (343)	32.48 (825)	8.62 (219)
TSBF-0102*	8.66 (220)	35.04 (890)	39.17 (995)	13.50 (343)	48.03 (1,220)	8.62 (219)
TSBF-0103*	3.50 (110)	11.81 (300)	15.52 (394)	8.66 (220)	19.06 (484)	4.49 (114)
TSBF-0104*	3.50 (110)	17.91 (455)	21.65 (550)	8.66 (220)	25.20 (640)	4.49 (114)

Dimensions for reference only and approximate. Exact dimensions for installation purposes available on request.

## Technical data

Models	No. of filter bags	Size	Flow rate <sup>1</sup> GPM (m³/h)	Max. pressure psi (bar)	Max. temp. °F (°C)	Housing volume gal (l)	Housing weight lb (kg)	I/O connections
SBF-0101	1	1	88 (20)	150 (10)	400 (160)	4.75 (18)	84.0 (38.1)	2" flange
SBF-0102	1	2	115 (26)	150 (10)	400 (160)	8.45 (32)	102.0 (46.3)	2" flange
SBF-0103*	1	3	26 (6)	300 (16)	225 (160)	0.79 (3)	24.0 (12.0)	1½" thread
SBF-0104*	1	4	53 (12)	300 (16)	225 (160)	1.19 (4.5)	26.0 (13.0)	1½" thread
TSBF-0101*	1	1	88 (20)	150 (6)	400 (160)	4.75 (18)	84.0 (38.1)	2" flange
TSBF-0102*	1	2	115 (26)	150 (6)	400 (160)	8.45 (32)	102.0 (46.3)	2" flange
TSBF-0103*	1	3	26 (6)	300 (16)	225 (160)	0.79 (3)	24.0 (12.0)	1½" thread
TSBF-0104*	1	4	53 (12)	300 (16)	225 (160)	1.19 (4.5)	26.0 (13.0)	1½" thread

<sup>1</sup> Maximum theoretical flow based on water viscosity, filter bag specific.

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altludersheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Rua Clark, 2061 - Macuco  
13279-400 - Valinhos, Brazil  
Tel: +55 11 3616-8400

For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2017 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US  
EF-FBH-11  
03-2017



Powering Business Worldwide

