

AURORA® MODEL 341A & 361A PUMPS



JM & JP MOTOR FRAMES 143 THROUGH 184

Section 340/360 Page 201

Dated June 2013

Supersedes Section 340/360 Page 201

Dated January 2003

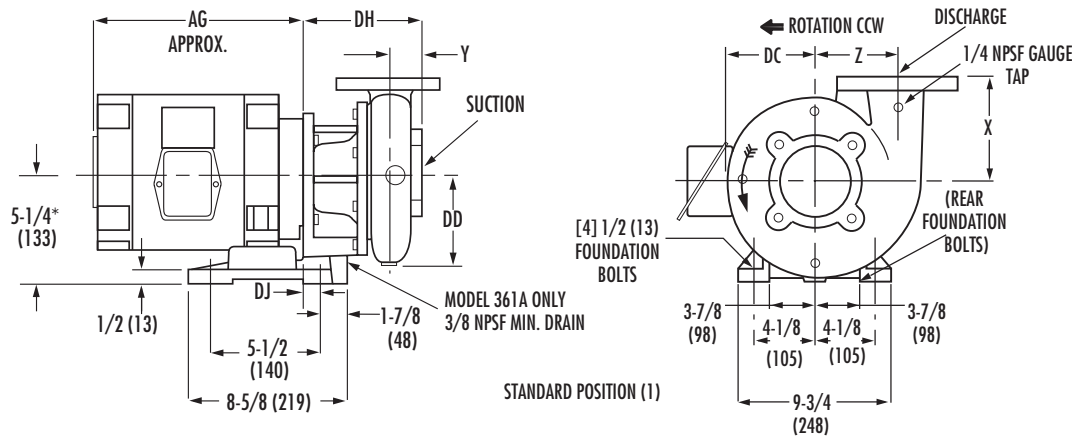

PUMPS WITH THREADED CONNECTIONS											
DISCHARGE	SUCTION	CASE BORE	X	Y	Z	DC	DD	DH		DJ	
								341A	361A	341A	361A
1-1/4	1-1/2	7	5-1/4 (133)	2-7/16 (62)	4-3/16 (106)	4-15/16 (125)	5-3/16 (132)	7-3/16 (183)	10-1/4 (266)		
1-1/4	1-1/2	9	6-5/8 (168)	2-9/16 (65)	5-3/8 (136)	6-3/16 (157)	6-3/8 (162)	7-1/4 (184)	10-5/16 (261)		
1-1/2	2	7	5-3/8 (136)	2-1/2 (63)	4-5/16 (109)	5-1/8 (130)	5-3/8 (136)	7-5/16 (186)	10-3/8 (263)		
1-1/2	2	9	6-3/4 (171)	2-5/8 (67)	5-1/2 (140)	6-5/16 (160)	6-9/16 (167)	7-3/8 (187)	10-7/16 (262)		
PUMPS WITH AM. STD. 125 LB. FLANGED CONNECTIONS											
2	2-1/2	7	5-5/8 (143)	1-7/8 (48)	4-9/16 (116)	5-3/8 (136)	5-13/16 (148)	6-13/16 (173)	9-7/8 (250)	5/8 (16)	1-7/8 (48)
2	2-1/2	9	7 (178)	1-7/8 (48)	5-11/16 (144)	6-1/2 (165)	6-7/8 (175)	6-3/4 (171)	9-13/16 (249)		
2-1/2	3	7	5-7/8 (149)	2 (51)	4-13/16 (122)	5-13/16 (148)	6-1/4 (159)	7-1/16 (179)	10-1/8 (257)		
2-1/2	3	9	7-1/4 (184)	2 (51)	5-15/16 (151)	6-3/4 (171)	7-1/4 (184)	7 (178)	10-1/16 (255)		
3	4	9	7-1/2 (190)	2-1/8 (54)	6-1/8 (156)	6-7/8 (175)	7-7/16 (189)	7-1/4 (184)	10-5/16 (261)		
4	4	7	6-1/2 (165)	2-1/2 (63)	5-1/2 (140)	6-7/16 (163)	7-5/16 (186)	7-15/16 (202)	11 (279)		
4	5	9A	7-1/4 (184)	3-1/8 (79)	5-3/4 (146)	6-11/16 (169)	7-3/8 (187)	8-3/8 (212)	11-7/16 (290)		
4	5	9B	7-3/4 (196)	2-5/8 (66)	6-5/8 (168)	8-1/16 (204)	8-11/16 (220)	8 (203)	11 (279)		

JM OR JP

FRAME	AG
143	10 (254)
145	11 (279)
182	11 (279)
184	12 (305)


NOTES:

- All dimensions in inches and (mm).
- Dimensions may vary $\pm 1/4$ (6).
- Not for construction purposes unless certified.
- Check discharge position. Casing dimension which exceed 5-1/4 (133) height may require pads for the support.
- Conduit box is shown in approximate location. Dimensions are not specified as they vary with each motor manufacturer.
- Model 341A uses JM motor frames.
Model 361A uses JP motor frames.

* 6-1/4 (159) for 9 (229) case bore pumps (Model 341A only).

AURORA® MODEL 341A & 361A PUMPS

ON CAST IRON BASE JM & JP MOTOR FRAMES 143 THROUGH 184

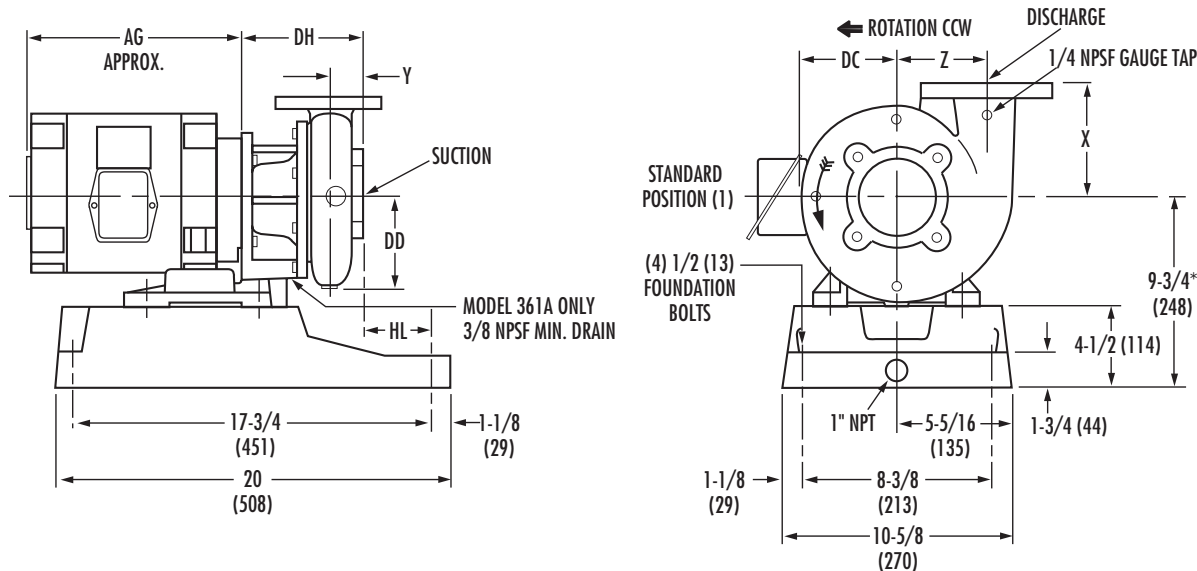

PUMPS WITH THREADED CONNECTIONS											
DISCHARGE	SUCTION	CASE BORE	X	Y	Z	DC	DD	DH		HL	
								341A	361A	341A	361A
1-1/4	1-1/2	7	5-1/4 (133)	2-7/16 (62)	4-3/16 (106)	4-15/16 (125)	5-3/16 (132)	7-3/16 (183)	10-1/4 (260)	3-3/16 (81)	1-3/8 (35)
1-1/4	1-1/2	9	6-5/8 (168)	2-9/16 (65)	5-3/8 (136)	6-3/16 (157)	6-3/8 (162)	7-1/4 (184)	10-5/16 (262)	3-1/8 (79)	1-5/16 (33)
1-1/2	2	7	5-3/8 (136)	2-1/2 (63)	4-5/16 (109)	5-1/8 (130)	5-3/8 (136)	7-5/16 (186)	10-3/8 (264)	3-1/16 (78)	1-1/4 (32)
1-1/2	2	9	6-3/4 (171)	2-5/8 (67)	5-1/2 (140)	6-5/16 (160)	6-9/16 (167)	7-3/8 (187)	10-7/16 (265)	3 (76)	1-3/16 (30)
PUMPS WITH AM. STD. 125 LB. FLANGED CONNECTIONS											
2	2-1/2	7	5-5/8 (143)	1-7/8 (48)	4-9/16 (116)	5-3/8 (136)	5-13/16 (148)	6-13/16 (173)	9-7/8 (251)	3-9/16 (90)	1-3/4 (44)
2	2-1/2	9	7 (178)	1-7/8 (48)	5-11/16 (144)	6-1/2 (165)	6-7/8 (175)	6-3/4 (171)	9-13/16 (249)	3-5/8 (92)	1-13/16 (46)
2-1/2	3	7	5-7/8 (149)	2 (51)	4-13/16 (122)	5-13/16 (148)	6-1/4 (159)	7-1/16 (179)	10-1/8 (257)	3-5/16 (84)	1-1/2 (38)
2-1/2	3	9	7-1/4 (184)	2 (51)	5-15/16 (151)	6-3/4 (171)	7-1/4 (184)	7 (178)	10-1/16 (256)	3-3/8 (86)	1-9/16 (32)
3	4	9	7-1/2 (190)	2-1/8 (54)	6-1/8 (156)	6-7/8 (175)	7-7/16 (189)	7-1/4 (184)	10-5/16 (262)	3-1/8 (80)	1-5/16 (33)
4	4	7	6-1/2 (165)	2-1/2 (63)	5-1/2 (140)	6-7/16 (163)	7-5/16 (186)	7-15/16 (202)	11 (279)	2-7/16 (62)	5/8 (16)

JM OR JP

FRAME	AG
143	10 (254)
145	11 (279)
182	11 (279)
184	12 (305)


NOTES:

- All dimensions in inches and (mm).
- Dimensions may vary $\pm 1/4$ (6).
- Not for construction purposes unless certified.
- Conduit box is shown in approximate location.
Dimensions are not specified as they vary with each motor manufacturer.

* 10-3/4 (159) for 9 (229) case bore pumps
(Model 341A only).

AURORA® MODEL 341A

5X6X12, 6X6X12
364TCZ FRAME

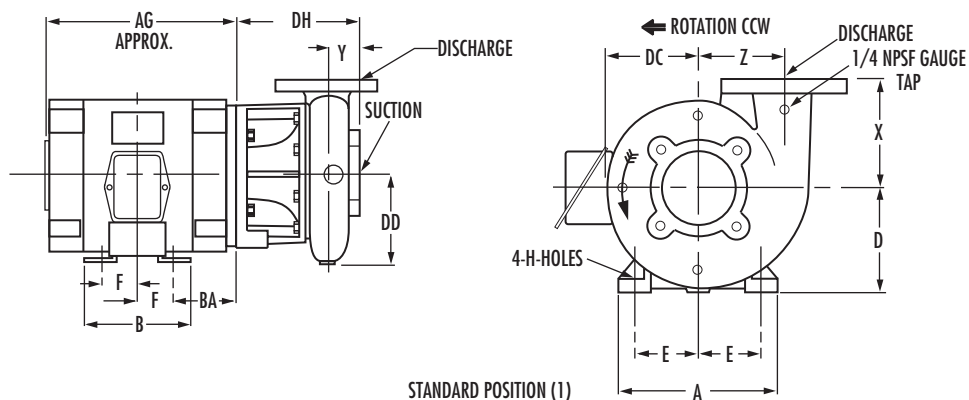

STANDARD POSITION (1)

ALL PUMPS 125 LB FLANGE CONNECTIONS

PUMP SIZE	X	Y	Z	DC	DD	DH
5X6X12	9.00 (229)	2.88 (73)	8.31 (211)	9.25 (235)	10.13 (257)	12.50 (318)
6X6X12B	9.25 (235)	3.13 (80)	8.69 (221)	9.69 (246)	11.25 (286)	14.25 (362)

MOTOR FRAME	364TCZ	365TCZ
A	18.00 (457)	18.00 (457)
B	14.75 (375)	15.75 (400)
D	9.00 (229)	9.00 (229)
E	7.00 (178)	7.00 (178)
F	5.63 (143)	6.13 (156)
H	0.66 (17)	0.66 (17)
AG approx.	26 (660)	28 (711)
BA	5.88 (149)	5.88 (149)

NOTES:

1. All dimensions in inches (mm), weight in pounds (KG).
2. Dimensions may vary $\pm 1/4"$ (6).
3. Not for construction purposes unless certified.
4. Conduit box is not specified as they vary with each motor manufacturer.

AURORA® MODEL 341A & 361A PUMPS


JM & JP MOTOR FRAMES 213 THROUGH 326

Section 340/360 Page 203


Dated June 2013

Supersedes Section 340/360 Page 203

Dated October 2007

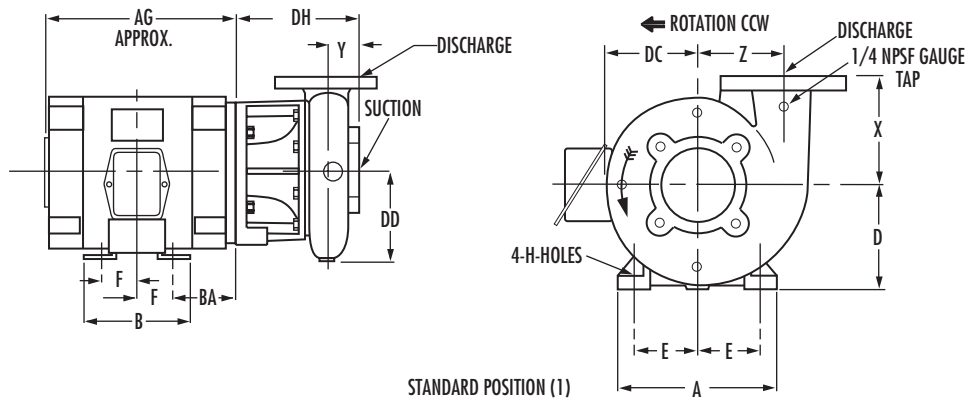

STANDARD POSITION (1)



PUMPS WITH THREADED CONNECTIONS									DH			
DISCHARGE	SUCTION	CASE BORE	X	Y	Z	DC	DD		341A	361A		
									213JM 215JM	254JM 256JM	284JM 326JM	213JP- 326JP
1-1/4	1-1/2	7	5-1/4 (133)	2-7/16 (62)	4-3/16 (106)	4-15/16 (125)	5-3/8 (132)		7-3/16 (183)	N/A	N/A	N/A
1-1/4	1-1/2	9	6-5/8 (168)	2-9/16 (65)	5-3/8 (136)	6-3/16 (157)	6-3/8 (162)		7-1/4 (184)	N/A	N/A	N/A
1-1/2	2	7	5-3/8 (136)	2-1/2 (63)	4-5/16 (109)	5-1/8 (130)	5-3/8 (136)		7-5/16 (186)	N/A	N/A	N/A
1-1/2	2	9	6-3/4 (171)	2-5/8 (67)	5-1/2 (140)	6-5/16 (160)	6-9/16 (167)		7-3/8 (187)	8-3/8 (213)	8-3/8 (213)	11-1/4 (286)
1-1/2	2	11	9 (229)	2-13/16 (71)	6-1/8 (156)	7-1/16 (179)	7-1/4 (184)		7-9/16 (192)	8-9/16 (217)	8-9/16 (217)	11-7/16 (290)
1-1/2	2	12	7-3/4 (197)	2-3/4 (70)	7-1/16 (179)	8 (203)	8-1/4 (210)		7-5/8 (194)	8-5/8 (219)	N/A	11-1/2 (292)
PUMPS WITH ANSI 125 LB. FLANGED CONNECTIONS												
2	2-1/2	7	5-5/8 (143)	1-7/8 (48)	4-9/16 (116)	5-3/8 (136)	5-13/16 (148)		6-13/16 (173)	7-13/16 (198)	N/A	10-11/16 (271)
2	2-1/2	9	7 (178)	1-7/8 (48)	5-11/16 (144)	6-1/2 (165)	6-7/8 (175)		6-3/4 (171)	7-3/4 (197)	7-3/4 (197)	10-5/8 (270)
2	2-1/2	12	8 (203)	1-7/8 (48)	7-3/16 (183)	8-3/16 (208)	8-1/2 (216)		6-7/8 (175)	7-7/8 (200)	N/A	10-3/4 (273)
2	3	11	8 (203)	2-3/8 (60)	6-1/2 (165)	7 (178)	7-3/8 (187)		7-1/2 (190)	8-1/2 (216)	8-1/2 (216)	11-3/8 (289)
2-1/2	3	7	5-7/8 (149)	2 (51)	4-13/16 (122)	5-13/16 (148)	6-1/4 (159)		7-1/16 (179)	8-1/16 (205)	N/A	10-15/16 (278)
2-1/2	3	9	7-1/4 (184)	2 (51)	5-15/16 (151)	6-3/4 (171)	7-1/4 (184)		7 (178)	8 (203)	8 (203)	10-7/8 (276)
2-1/2	3	12	8-1/4 (210)	2 (51)	7-3/8 (187)	8-3/8 (213)	8-3/4 (213)		7-1/8 (181)	8-1/8 (206)	8-1/8 (206)	11 (279)
3	4	9	7-1/2 (190)	2-1/8 (54)	6-1/8 (156)	6-7/8 (175)	7-7/16 (189)		7-1/4 (184)	8-1/4 (210)	8-1/4 (210)	11-1/8 (283)
3	4	11	9 (229)	2-3/4 (70)	7 (179)	7-9/16 (192)	8-3/16 (208)		8-3/16 (208)	9-3/16 (233)	9-3/16 (233)	12-1/16 (306)
3	4	12	8-1/2 (216)	2-1/8 (54)	7-9/16 (192)	8-7/16 (214)	8-15/16 (227)		7-5/8 (194)	8-5/8 (219)	8-5/8 (219)	11-1/4 (286)
4	4	7	6-1/2 (165)	2-1/2 (63)	5-1/2 (140)	6-7/16 (163)	7-5/16 (186)		7-15/16 (202)	8-15/16 (227)	8-15/16 (227)	11-13/16 (300)
4	5	9A	7-1/4 (184)	3-1/8 (79)	5-3/4 (146)	6-11/16 (170)	7-3/8 (187)		8-3/8 (213)	9-3/8 (238)	9-3/8 (238)	12-1/4 (311)
4	5	9B	7-3/4 (197)	2-5/8 (67)	6-5/8 (168)	8-1/16 (205)	8-11/16 (221)		8 (203)	9 (229)	N/A	11-7/8 (302)
4	5	11	9 (229)	3 (76)	7-1/4 (184)	7-15/16 (202)	8-11/16 (221)		8-5/8 (219)	9-5/8 (244)	9-5/8 (244)	12-1/2 (317)
4	5	12	8-3/4 (222)	2-5/8 (67)	7-15/16 (202)	8-7/8 (225)	9-9/16 (243)		N/A	9-3/8 (238)	9-3/8 (238)	12 (305)
5	6	11	9 (229)	3-1/8 (79)	8-1/16 (205)	8-11/16 (221)	10-1/8 (257)		9-1/8 (232)	10-1/8 (257)	10-1/8 (259)	13 (330)
5	6	12	9 (229)	2-7/8 (73)	8-5/16 (211)	9-1/4 (235)	10-1/8 (257)		N/A	9-7/8 (251)	9-7/8 (251)	12-1/2 (317)
6	6	9	8-1/4 (210)	2-3/4 (70)	7 (178)	8 (203)	9 (229)		8-1/4 (210)	9-1/4 (235)	N/A	12-1/8 (308)
6	6	11	9-1/4 (235)	3-1/8 (79)	8-11/16 (221)	9-11/16 (246)	11-1/4 (286)		9-7/8 (251)	10-3/8 (264)	10-3/8 (264)	13 (330)
6	6	12	9-1/4 (235)	3-1/8 (79)	8-11/16 (221)	9-11/16 (246)	11-1/4 (286)		N/A	10-3/8 (264)	10-3/8 (264)	13 (330)

NOTES:

1. All dimensions in inches and (mm).
2. Dimensions may vary $\pm 1/4$ (6).
3. Not for construction purposes unless certified.
4. N/A = Not Applicable.
5. Check discharge position, casing dimensions which exceed dimension "D" may require pads for the motor.
6. Conduit box is shown in approximate location. Dimensions are not specified as they vary with each motor manufacturer.



JM OR JP MOTOR FRAMES

FRAME	213	215	254	256	284	286	324	326
A	10-1/2 (267)	10-1/2 (267)	12-1/2 (317)	12-1/2 (317)	14 (356)	14 (356)	16 (406)	16 (406)
B	7-1/2 (190)	9 (229)	10-3/4 (273)	12-1/2 (317)	12-1/2 (317)	14 (356)	14 (356)	15-1/2 (394)
D	5-1/4 (133)	5-1/4 (133)	6-1/4 (159)	6-1/4 (159)	7 (178)	7 (178)	8 (203)	8 (203)
E	4-1/4 (108)	4-1/4 (108)	5 (127)	5 (127)	5-1/2 (140)	5-1/2 (140)	6-1/4 (159)	6-1/4 (159)
F	2-3/4 (70)	3-1/2 (89)	4-1/8 (111)	5 (127)	5-1/2 (140)	5-1/2 (140)	5-1/4 (133)	5-1/4 (133)
H	13/32 (10)	13/32 (10)	17/32 (13)	17/32 (13)	17/32 (13)	17/32 (13)	21/32 (16)	21/32 (16)
AG APPROX.	14 (356)	15 (381)	17-1/2 (444)	19 (483)	19 (483)	21 (533)	22 (559)	23 (584)
BA	4-1/2 (114)	4-1/2 (114)	5 (127)	5 (127)	5-1/2 (140)	5-1/2 (140)	5-1/2 (140)	5-1/2 (140)



AURORA® MODEL 341A & 361A PUMPS

ON CAST IRON BASE JM & JP MOTOR FRAMES 213 THROUGH 256

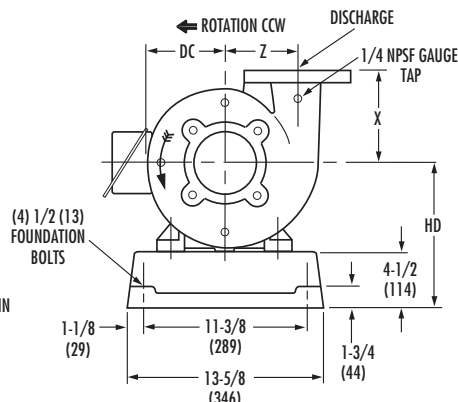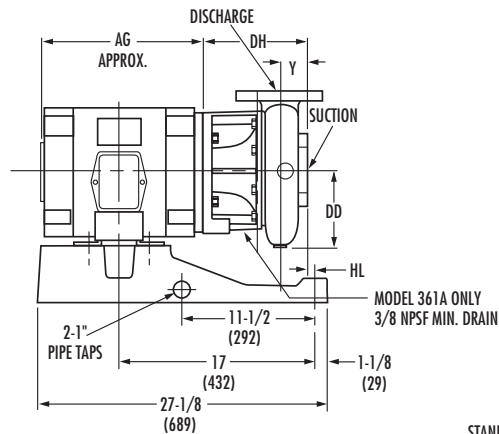

STANDARD POSITION (1)

JM OR JP

FRAME	AG
213	14 (355)
215	15 (381)
254	17 (431)
256	19 (355)

PUMPS WITH THREADED CONNECTIONS								DH			HD		HL		
DISCHARGE	SUCTION	CASE BORE	X	Y	Z	DC	DD	341A		361A					
								213JM 215JM	254JM 256JM	213JP- 256JP	213 215	254 256	213JM 215JM	254JM 256JM	213JP 256JP
1 1/4	1 1/2	7	5-1/4 (133)	2-7/16 (62)	4-3/16 (106)	4-15/16 (125)	5-3/16 (132)	7-3/16 (183)	N/A	N/A	9-3/4* (248)	N/A	1-15/16 (49)	N/A	N/A
1-1/4	1-1/2	9	6-5/8 (168)	2-9/16 (65)	5-3/8 (137)	6-3/16 (157)	6-3/8 (162)	7-1/4 (184)	N/A	N/A	9-3/4* (248)	N/A	1-7/8 (48)	N/A	N/A
1-1/2	2	7	5-3/8 (137)	2-1/2 (64)	4-5/16 (110)	5-1/8 (130)	5-3/8 (137)	7-5/16 (186)	N/A	N/A	9-3/4* (248)	N/A	1-13/16 (46)	N/A	N/A
1-1/2	2	9	6-3/4 (171)	2-5/8 (67)	5-1/2 (140)	6-5/16 (160)	6-9/16 (167)	7-3/8 (187)	8-3/8 (213)	11-1/4 (286)	9-3/4 (248)	10-3/4 (273)	1-3/4 (44)	3/4 (19)	2-1/8 (54)
1-1/2	2	11	9 (229)	2-13/16 (71)	6-1/8 (156)	7-1/16 (179)	7-1/4 (184)	7-9/16 (192)	N/A	11-7/16 (291)	9-3/4 (248)	N/A	1-1/2 (38)	N/A	2-3/8 (60)
1-1/2	2	12	7-3/4 (197)	2-3/4 (70)	7-1/16 (179)	8 (203)	8-1/4 (210)	7-5/8 (194)	8-5/8 (219)	11-1/2 (292)	10-1/2 (267)	10-3/4 (273)	1-1/2 (38)	1/2 (13)	2-3/8 (60)
PUMPS-WITH-ANSI-125-LB.-FLANGED-CONNECTIONS															
2	2-1/2	7	5-5/8 (143)	1-7/8 (48)	4-9/16 (116)	5-3/8 (137)	5-13/16 (148)	6-13/16 (173)	7-13/16 (198)	10-11/16 (271)	9-3/4 (248)	10-3/4 (273)	2-5/16 (59)	1-5/16 (33)	1-9/16 (40)
2	2-1/2	9	7 (178)	1-7/8 (48)	5-11/16 (144)	6-1/2 (165)	6-7/8 (175)	6-3/4 (171)	7-3/4 (197)	10-5/8 (270)	9-3/4 (248)	10-3/4 (273)	2-3/8 (60)	1-3/8 (35)	1-1/2 (38)
2	2-1/2	12	8 (203)	1-7/8 (48)	7-3/16 (183)	8-3/16 (208)	8-1/2 (216)	6-7/8 (175)	7-7/8 (200)	10-3/4 (273)	10-1/2 (267)	10-3/4 (273)	2-1/4 (57)	1-1/4 (32)	1-5/8 (41)
2	3	11	8 (203)	2-3/8 (60)	6-1/2 (165)	7 (178)	7-3/8 (187)	7-1/2 (191)	8-1/2 (216)	11-3/8 (289)	9-3/4 (248)	10-3/4 (273)	1-1/2 (38)	1/2 (13)	2-1/16 (52)
2-1/2	3	7	5-7/8 (149)	2 (51)	4-13/16 (122)	5-13/16 (148)	6-1/4 (159)	7-1/16 (179)	8-1/16 (205)	10-15/16 (278)	9-3/4 (248)	10-3/4 (273)	2-1/16 (52)	1-1/16 (27)	1-13/16 (46)
2-1/2	3	9	7-1/4 (184)	2 (51)	5-15/16 (151)	6-3/4 (171)	7-1/4 (184)	7 (178)	8 (203)	10-7/8 (276)	9-3/4 (248)	10-3/4 (273)	2-1/8 (54)	1-1/8 (29)	1-3/4 (44)
2-1/2	3	12	8-1/4 (210)	2 (51)	7-3/8 (187)	8-3/8 (213)	8-3/4 (222)	7-1/8 (181)	8-1/8 (206)	11 (279)	10-1/2 (267)	10-3/4 (273)	2 (51)	1 (25)	1-7/8 (48)
3	4	9	7-1/2 (191)	2-1/8 (54)	6-1/8 (156)	6-7/8 (175)	7-7/16 (189)	7-1/4 (184)	8-1/4 (210)	11-1/8 (283)	9-3/4 (248)	10-3/4 (273)	1-7/8 (48)	7/8 (22)	2 (51)
3	4	11	9 (229)	2-3/4 (70)	7 (178)	7-9/16 (192)	8-3/16 (208)	8-3/16 (208)	9-3/16 (233)	12-1/16 (306)	10-1/2 (267)	10-3/4 (273)	13/16 (20)	0	2-3/4 (70)
3	4	12	8-1/2 (216)	2-1/8 (54)	7-9/16 (192)	8-7/16 (214)	8-15/16 (227)	7-5/8 (194)	8-5/8 (219)	11-1/4 (286)	10-1/2 (267)	10-3/4 (273)	1-3/4 (44)	3/4 (19)	2-1/8 (54)
4	4	7	6-1/2 (165)	2-1/2 (64)	5-1/2 (140)	6-7/16 (164)	7-5/16 (186)	7-15/16 (202)	8-15/16 (227)	11-13/16 (300)	9-3/4 (248)	10-3/4 (273)	1-3/16 (30)	3/16 (4)	2-11/16 (68)
4	5	9A	7-1/4 (184)	3-1/8 (79)	5-3/4 (146)	6-11/16 (170)	7-3/8 (187)	8-3/8 (213)	N/A	12-1/4 (311)	9-3/4 (248)	N/A	3/4 (19)	N/A	3-1/8 (79)
4	5	9B	7-3/4 (197)	2-5/8 (67)	6-5/8 (168)	8-1/16 (205)	8-11/16 (221)	8 (203)	9 (229)	11-7/8 (302)	10-1/2 (267)	10-3/4 (273)	1-1/8 (29)	1/8 (3)	2-3/4 (70)
4	5	11	9 (229)	3 (76)	7-1/4 (184)	7-15/16 (202)	8-11/16 (221)	8-5/8 (219)	9-5/8 (244)	12-1/2 (318)	11-1/4 (286)	11-1/2 (292)	3/8 (10)	0	3-3/16 (81)
4	5	12	8-3/4 (222)	2-5/8 (67)	7-15/16 (202)	8-7/8 (225)	9-9/16 (243)	N/A	9-3/8 (238)	12 (305)	N/A	10-3/4 (273)	N/A	0	2-7/8 (73)
5	6	11	9 (229)	3-1/8 (79)	8-1/16 (205)	8-11/16 (221)	10-1/8 (257)	9-1/8 (232)	10-1/8 (257)	13 (330)	12-1/4 (311)	12-1/4 (311)	0	0	3-11/16 (94)
6	6	9	8-1/4 (210)	2-3/4 (70)	7 (178)	8 (203)	9 (229)	8-1/4 (210)	9-1/4 (235)	12-1/8 (308)	10-1/2 (267)	10-3/4 (273)	7/8 (22)	0	3 (76)

NOTES:

- All dimensions in inches and (mm).
- Dimensions may vary $\pm 1/4$ (6).
- Not for construction purposes unless certified.
- N/A = Not Applicable.
- Conduit box is shown in approximate location. Dimensions are not specified as they vary with each motor manufacturer.

AURORA® MODEL 341A PUMPS ■


6X8X15 & 8X10X15
365TCZ-444TCZ

Section 340/360 Page 209

Dated June 2013

Supersedes Section 340/360 Page 209

Dated October 2003

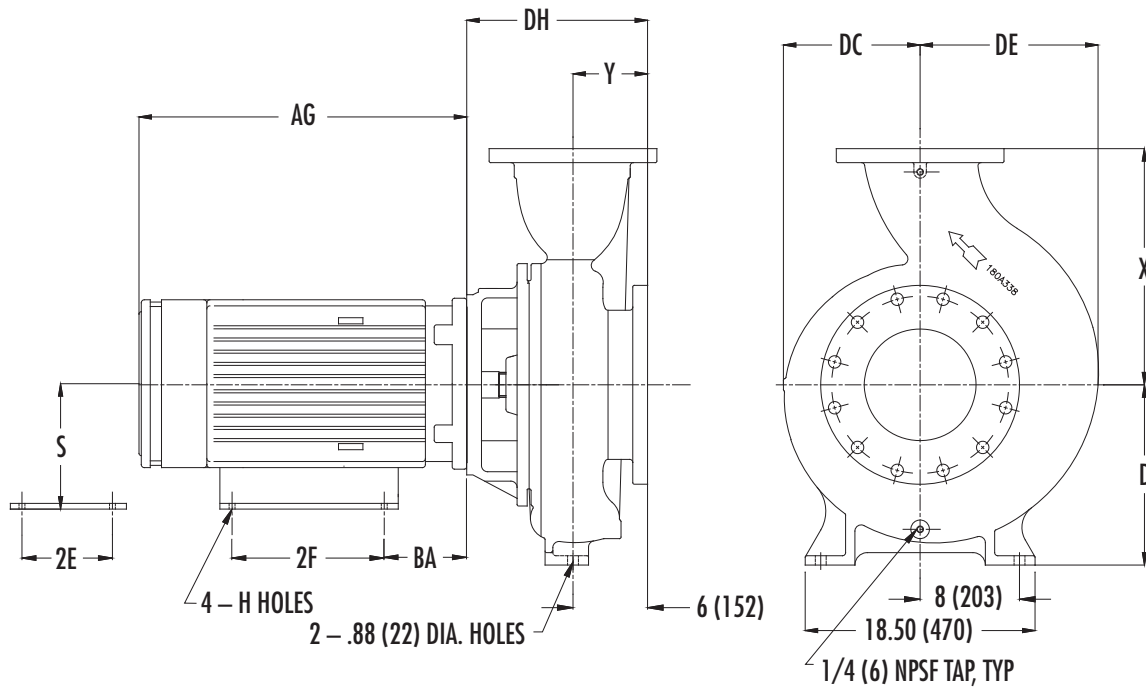

PUMP SIZE									
DISCHARGE	SUCTION	CASE BORE	X	Y	D	DE	DC	DH	PUMP WEIGHT
6	8	15	18.00 (457)	6.00 (152)	14.50 (368)	12.88 (327)	10.44 (265)	9.56 (243)	365 (166)
8	10	15	19.00 (483)	6.00 (152)	14.50 (368)	14.38 (365)	11.00 (279)	9.56 (243)	505 (229)

Motor Frame	364TCZ	365TCZ	404TCZ	405TCZ	444TCZ	445TCZ
BA	5.88 (149)	5.88 (149)	6.62 (168)	6.62 (168)	7.50 (191)	7.50 (191)
2F	11.25 (286)	12.25 (311)	12.25 (311)	13.75 (349)	14.50 (368)	16.50 (419)
2E	14.00 (356)	14.00 (356)	16.00 (406)	16.00 (406)	18.00 (457)	18.00 (457)
S	9.00 (229)	9.00 (229)	10.00 (254)	10.00 (254)	11.00 (279)	11.00 (279)
H	0.66 (17)	0.66 (17)	0.81 (21)	0.81 (21)	0.81 (21)	0.81 (21)
AG approx	31.5 (800)	32.5 (826)	34 (864)	37.5 (953)	43 (1092)	48 (1219)

NOTES:

1. ALL DIMENSIONS IN INCHES (MM), WEIGHT IN POUNDS (KG)
2. DIMENSIONS MAY VARY PLUS/MINUS 1/4"
3. NOT FOR CONSTRUCTION PURPOSES UNLESS CERTIFIED.
4. CONDUIT BOX IS NOT SPECIFIED AS THEY VARY WITH EACH MOTOR MANUFACTURER.